

## Colour display apparatus

**Publication number:** CN1277707

**Publication date:** 2000-12-20

**Inventor:** TOMOKO MORITA (JP); YUICHI ISHIKAWA (JP);  
MITSUHIRO KASAHARA (JP)

**Applicant:** MATSUSHITA ELECTRIC IND CO LTD (JP)

**Classification:**

- international: **G09G3/28**; G09G3/30; G09G3/32; **G09G3/28**;  
G09G3/30; G09G3/32; (IPC1-7): G09G3/28

- European: G09G3/28T

**Application number:** CN19998001606 19990914

**Priority number(s):** JP19980264616 19980918; JP19990125817 19990506

**Also published as:**

WO0017845 (A1)  
EP1031131 (A1)  
US6380943 (B1)  
KR20020095597 (A)  
EP1031131 (A0)


more >>

[Report a data error here](#)

Abstract not available for CN1277707

Abstract of corresponding document: **US6380943**

This invention provides a display apparatus having high accuracy to control automatically power consumed for display operation suitable for emission-type display apparatus like a plasma display apparatus, electroluminescence display apparatus and a light emission diode display apparatus. The display apparatus comprises an emission unit (27), integrating circuits (11,12,13) for integrating input picture signals of R, G and B for each predetermined period to output average levels of R signal, G signal and B signal, respectively, multiplying circuits (14,15,16) for multiplying those average levels by their respective parameters  $K_R$ ,  $K_G$  and  $K_B$ , respectively, an adder (17) for obtaining a signal indicating expected consumption power on the emission unit by adding output signals from the multiplying circuits, a controller (18) for receiving the power prediction signal to output a control signal based on the received signal, and a brightness control circuit for controlling light emission amount per unit area according to the control signal.

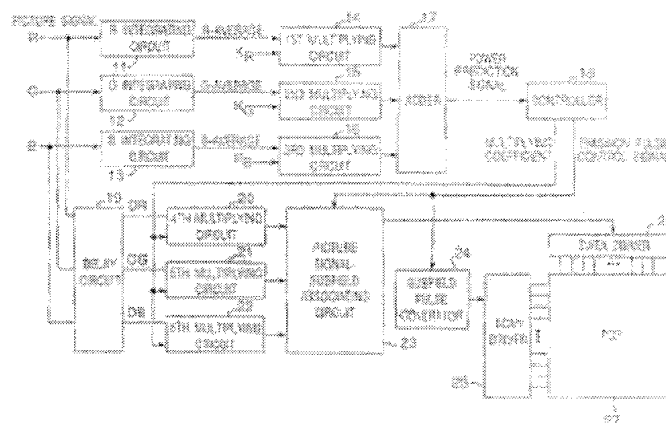

Data supplied from the **esp@cenet** database - Worldwide